

VERTICAL APPLICATION GUIDE

Because conditions & methods of use are beyond our control, this selection guide should not be used in substitution for customer tests to ensure product selections are effective and fully satisfactory for the intended end use. Please consult technical data sheets for exact specifications, surface preparation, applications, etc.

Single Component

Silicone
Dowsil: 732, 786, HVAC/R
Pecora: 860, 864NST, 895NST, 898NST


Latex
Pecora AC-20 FTR
Pecora AC-20+

Polyurethane / Hybrid
Sikaflex: CR 195, NPI, TXI, HY 150, IA
Vulkem II6

Polyurethane / Hybrid
Sikaflex: HY 150, NP2
Sika 2C EZ NS
Vulkem II6 w/227 catalyst



We invest in your success with products, pricing, and service you can trust!

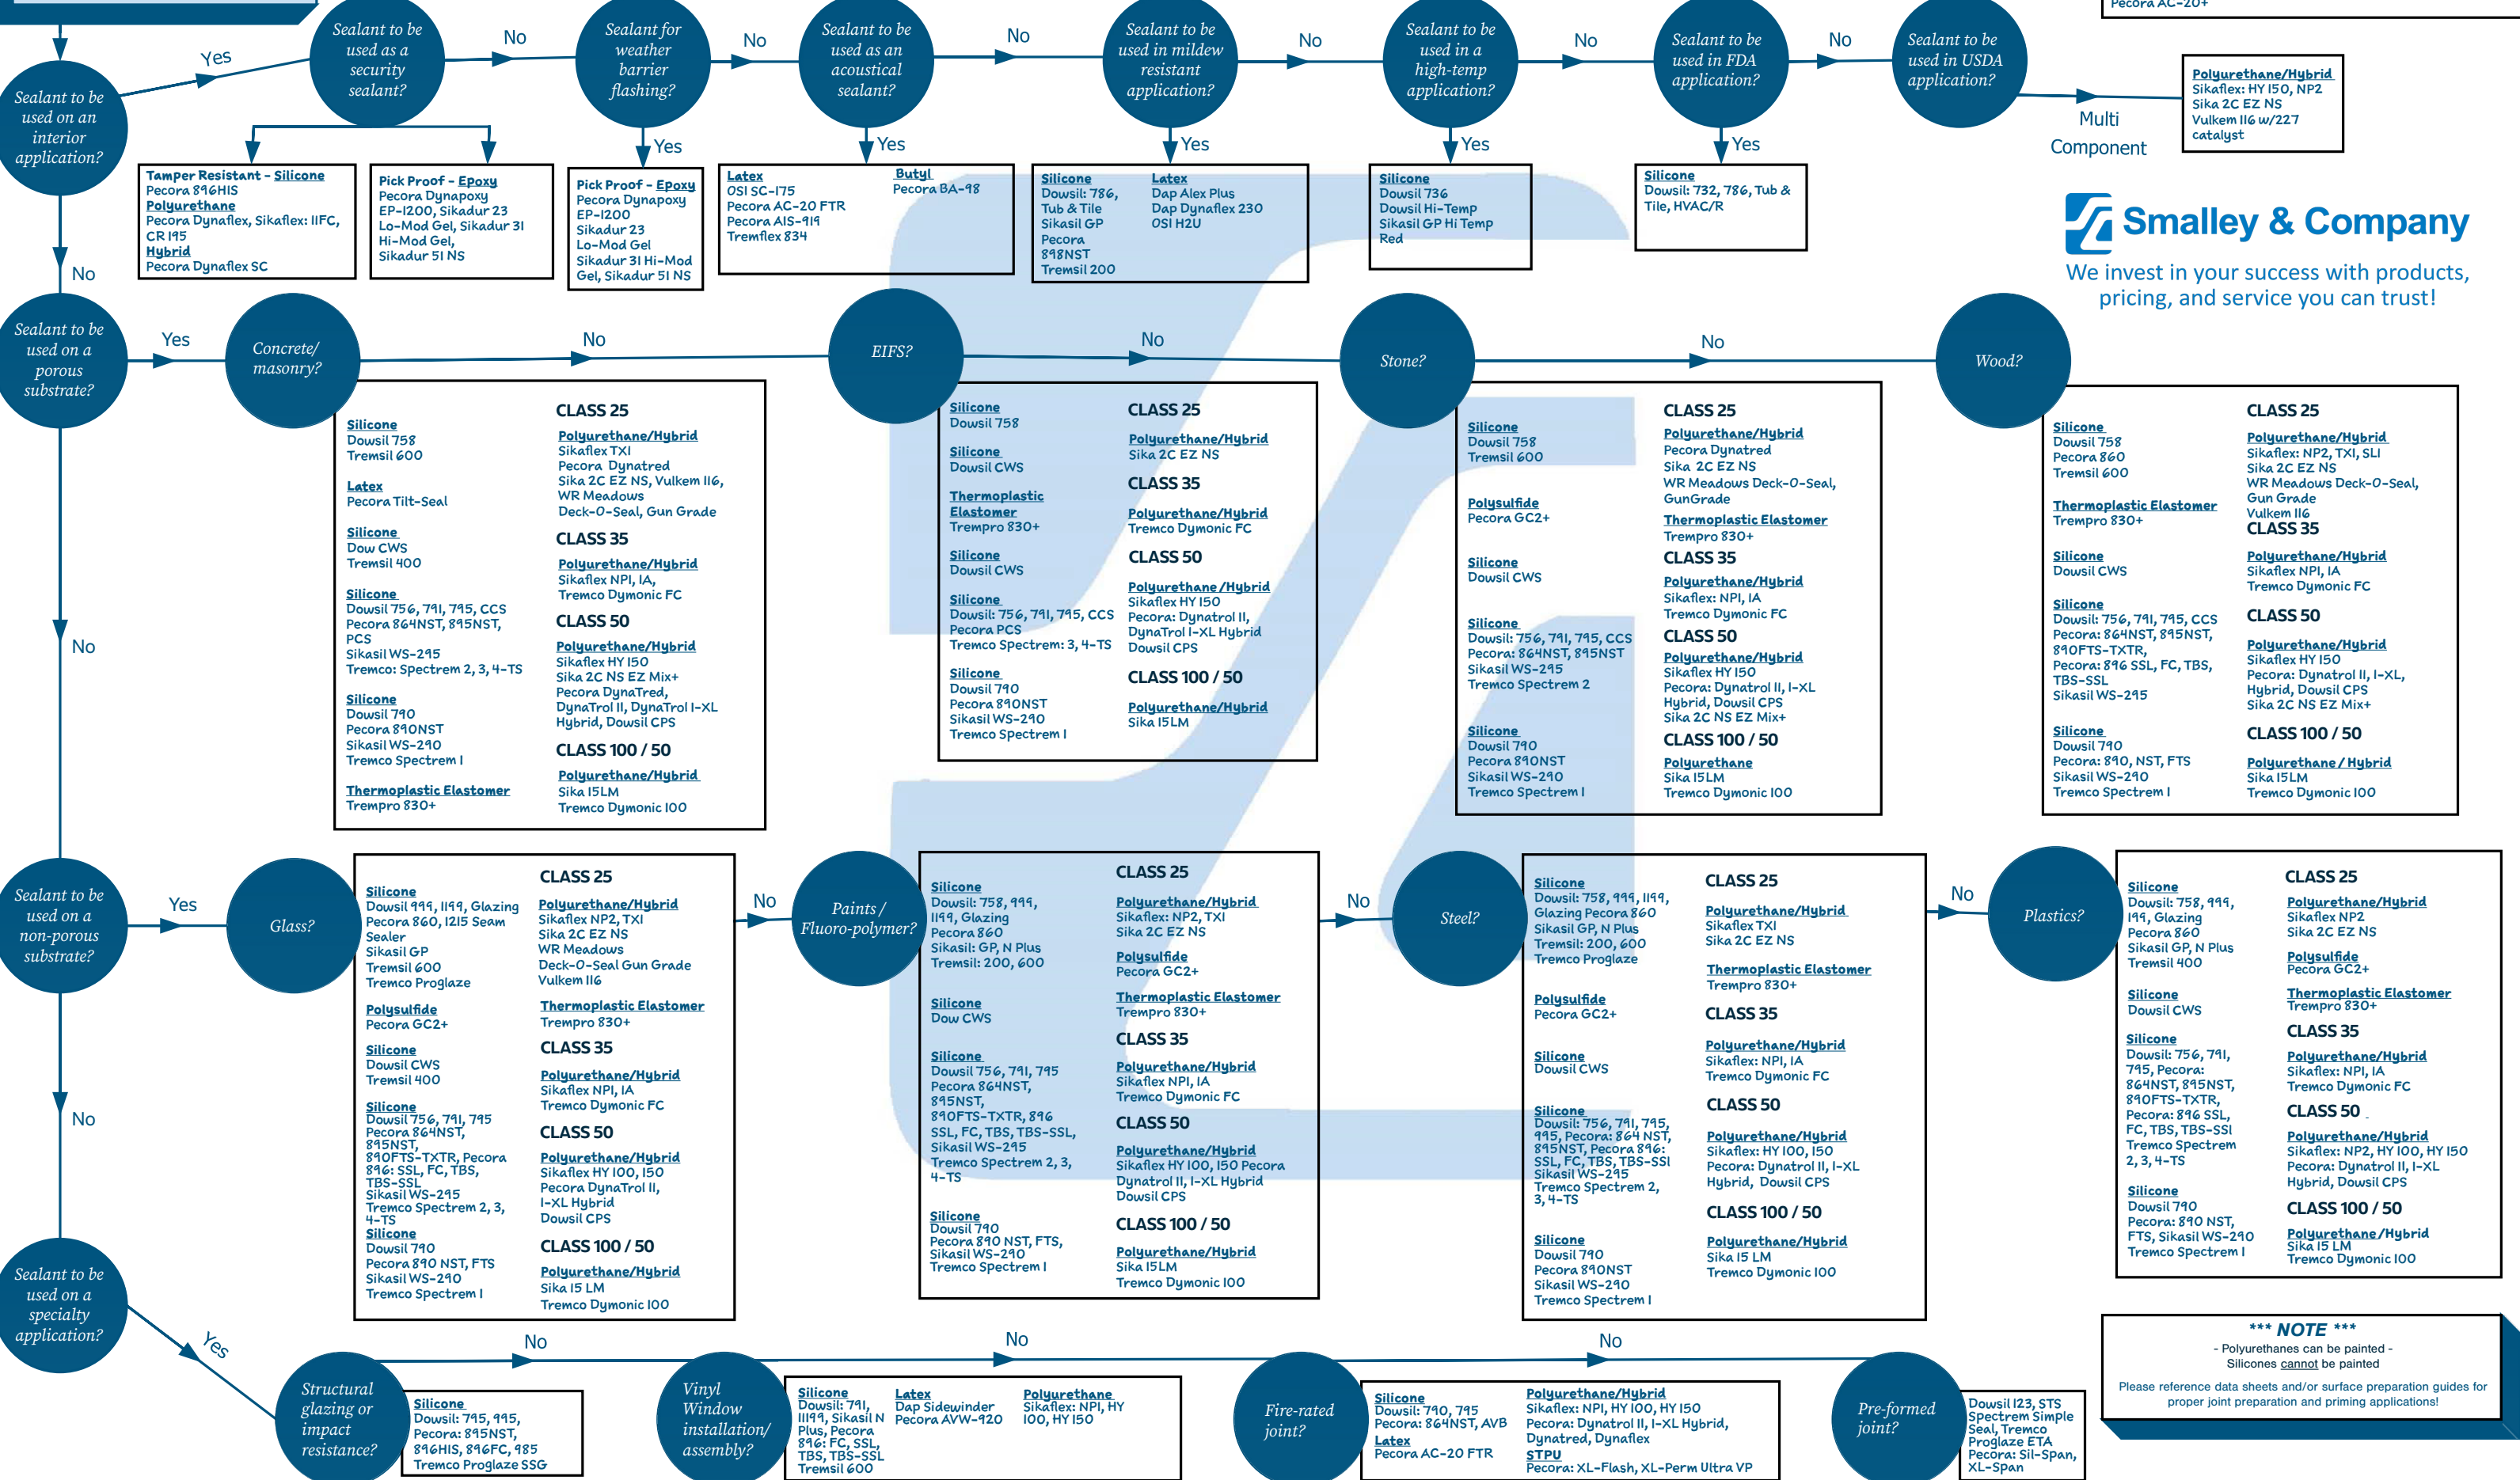

***** NOTE *****

- Polyurethanes can be painted - Silicones cannot be painted

Please reference data sheets and/or surface preparation guides for proper joint preparation and priming applications!